

sofamel

Product Technical Specifications

PATC-5014H




Earthing and short-circuit equipment
– Medium voltage substations



5014H



TT-38A

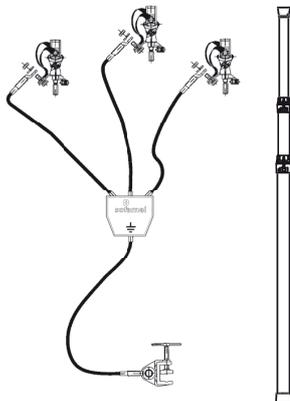

Functionality

Earthing and short-circuit equipment for medium voltage substations. The main aim for its installation is operator's protection against an accidental commissioning or possible voltage return during repair operations.




PATC-5014H

Earthing and short-circuit equipment – Medium voltage substations

MODEL	MAX. ICC
PATC-5014H/2525	6,9 KA/1s
PATC-5014H/3535	9,0 KA/1s
PATC-5014H/5050	12,0 KA/1s

Product Features

The 5014H clamp is perfect for difficult access areas. The clamp can be adjusted depending on the required inclination thanks to its multi-directional head system.

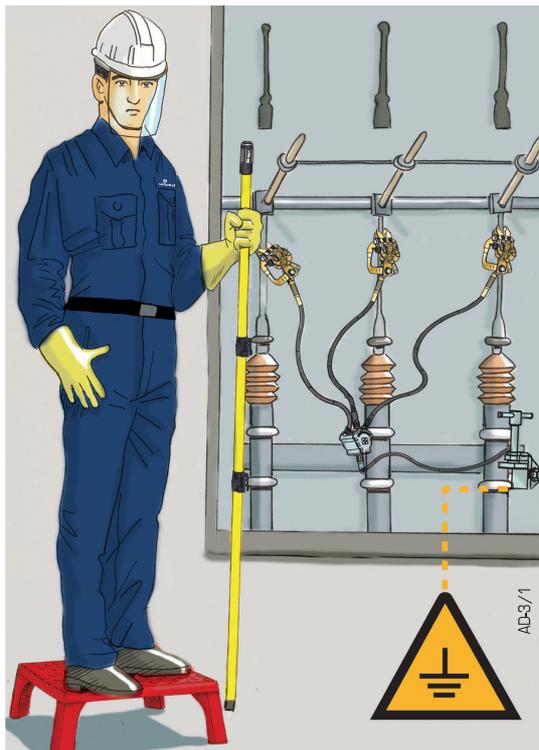

Composed of

- 3 5014H aluminium alloy clamps with screw tighten and Hexagonal-12 fixing for cylindrical conductors with diameter between 5 and 25 mm.
- 3 copper cables with PVC insulation of 25/35/50 mm² section depending on model and 0,75 m long.
- 1 copper cable with PVC insulation of 25/35/50 mm² section depending on model and 2 m long.
- 1 insulated trifurcating connector.
- 1 TT-38A milling earthing lathe.
- 1 telescopic pole 1,5 m with three sections.
- 1 plastic case to store and transport the equipment.

Certified

According to the Standard **IEC 61230**.



Datos sujetos a cambios
2017, Mayo 2

© 2017 Sofamel SLU
Todos los derechos reservados.

Versión: R2-7.2 COM01

Las especificaciones están sujetas a cambios sin previo aviso.